



IECEX Certificate of Conformity

INTERNATIONAL ELECTROTECHNICAL COMMISSION IEC Certification System for Explosive Atmospheres

for rules and details of the IECEx Scheme visit www.iecex.com

Certificate No.: **IECEX FTZU 26.0006X** Page 1 of 3 [Certificate history:](#)
Status: **Current** Issue No: 0
Date of Issue: 2026-02-13
Applicant: **BARTEC F.N. S.R.L.**
Via M. Pagano, 3
I - 20090 Trezzano sul Naviglio (MI)
Italy
Equipment: **LED Luminaire, type Escape Ex2**
Optional accessory:
Type of Protection: **Restricted-breathing enclosure "nR", Dust protection "t"**
Marking: Ex nR IIC T6 Gc
Ex tb IIIC T85 °C Db

Approved for issue on behalf of the IECEx
Certification Body:

Dipl. Ing. Lukáš Martinák

Position:

Head of the Certification Body

Signature:
(for printed version)

Gavriuk

Date:
(for printed version)

2026-02-13



1. This certificate and schedule may only be reproduced in full.
2. This certificate is not transferable and remains the property of the issuing body.
3. The Status and authenticity of this certificate may be verified by visiting www.iecex.com or use of this QR Code.



Certificate issued by:

Fyzikálně technický zkušební ústav
(Physical -Technical Testing Institute)
Pikartská 7, 71607 Ostrava - Radvanice
Czech Republic





IECEX Certificate of Conformity

Certificate No.: **IECEX FTZU 26.0006X**

Page 2 of 3

Date of issue: 2026-02-13

Issue No: 0

Manufacturer: **BARTEC F.N. S.R.L.**
Via M. Pagano, 3
I - 20090 Trezzano sul Naviglio (MI)
Italy

Manufacturing
locations:

This certificate is issued as verification that a sample(s), representative of production, was assessed and tested and found to comply with the IEC Standard list below and that the manufacturer's quality system, relating to the Ex products covered by this certificate, was assessed and found to comply with the IECEX Quality system requirements. This certificate is granted subject to the conditions as set out in IECEX Scheme Rules, IECEX 02 and Operational Documents as amended

STANDARDS :

The equipment and any acceptable variations to it specified in the schedule of this certificate and the identified documents, was found to comply with the following standards

IEC 60079-0:2017 Explosive atmospheres - Part 0: Equipment - General requirements
Edition:7.0

IEC 60079-15:2017 Explosive atmospheres - Part 15: Equipment protection by type of protection "n"
Edition:5.0

IEC 60079-31:2022 Explosive atmospheres – Part 31: Equipment dust ignition protection by enclosure "t"
Edition:3.0

This Certificate **does not** indicate compliance with safety and performance requirements other than those expressly included in the Standards listed above.

TEST & ASSESSMENT REPORTS:

A sample(s) of the equipment listed has successfully met the examination and test requirements as recorded in:

Test Report:

[CZ/FTZU/ExTR26.0006/00](#)

Quality Assessment Report:

[IT/CES/QAR09.0003/18](#)





IECEX Certificate of Conformity

Certificate No.: **IECEX FTZU 26.0006X**

Page 3 of 3

Date of issue: 2026-02-13

Issue No: 0

EQUIPMENT:

Equipment and systems covered by this Certificate are as follows:

The luminaire consists of four main parts: the housing, the optical opal cover, the reflector, and the mounting sheet for electrical components. The housing and cover are made of polycarbonate. The cover is attached to the housing using M5x25 screws, beneath which there are silicone o-rings. Additionally, the cover is secured by four protrusions that fit into the locking mechanism in the housing.

In the groove of the housing, there is a seal made of EPDM material or a silicone foam seal.

The painted steel carrier for the components is inserted into the housing and secured with four screws. On this carrier, the individual electrical components and other parts of the luminaire are attached. For emergency luminaires, emergency units are used, along with an LED indicator for the emergency unit status and either a NiCd VBA-N battery.

The component carrier also includes a three-pole (or multi-pole) terminal block for connecting the power cable with conductor cross-sections up to 2.5 mm². Power cable entries shall be provided by plastic or metal cable glands (M20x1.5; M25x1.5), which meet the required protection type, with a minimum ingress protection rating of IP66. Other holes in the housing shall be sealed using cable glands with blanking plugs or plugs, which must meet the same parameters as the cable glands.

Emergency mode testing for luminaires with emergency units is performed using by a magnet and a magnetic switch.

The luminaire is equipped with a test port for verifying the properties of the restricted breathing enclosure (nR) after installation, during commissioning, and during maintenance.

The luminaire contains LEDs on the LED module that are considered as non-array divergent LEDs and these LEDs are to be excluded based on Clause 1 of the standard IEC 60079-28:2015.

Electrical parameters:

$U_n = 220V + 240V, 0/50/60 \text{ Hz}$

for emergency unit $U_n = 220V + 240V, 50/60 \text{ Hz}$

SPECIFIC CONDITIONS OF USE: YES as shown below:

1. Ambient temperature range: - see Annex to the certificate IECEX FTZU 26.0006X, Issue No: 0.
2. The luminaire is intended for fixed installation and must be labelled "Warning - potential danger of electrostatic charging" - see Operation Instructions.
3. The power supply cable shall be effectively fixed to prevent pulling or twisting.
4. Shall be used only Ex equipment cable glands and Ex equipment blanking elements with Ex protection Ex eb and Ex tb with IP 66 and with a minimum service temperature range -30°C to +60°C.
5. The Operation Instructions for mounting and maintenance must be complied.
6. The battery pack must not be replaced in hazardous areas (unless the area is shown to be free from a hazardous atmosphere).
7. The luminaire shall be installed to avoid a risk from propagating brush discharges for application in explosive dust atmosphere.

Annex:

[Annex_to_IECEX_FTZU_26_0006X00.pdf](#)






Applicant: **BARTEC F.N. S.R.L.**
Address: **Via M. Pagano, 3; I-20090 Trezzano sul Naviglio (MI) Italy**

Electrical Apparatus: **LED Luminaire, type Escape Ex2**

Type code marking of luminaire:

ESCZ * * * * * * * * FE

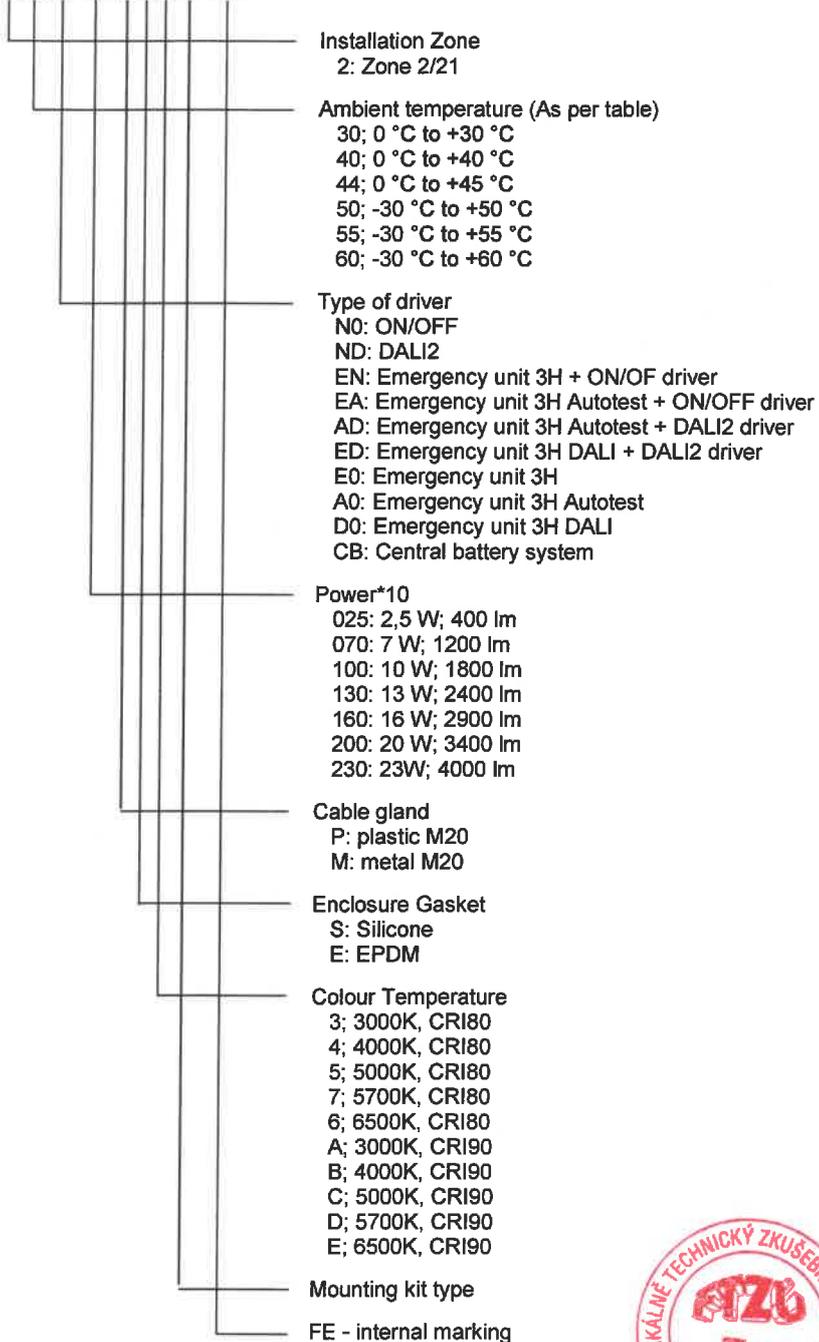



Annex to Certificate of Conformity
IECEX FTZU 26.0006X, Issue No: 0



Applicant: **BARTEC F.N. S.R.L.**
Address: **Via M. Pagano, 3; I-20090 Trezzano sul Naviglio (MI) Italy**

Electrical Apparatus: **LED Luminaire, type Escape Ex2**

Table of temperature ranges:

Admissible Temperature Ranges		
Type of driver	Power	Ambient Temperature Range
N0; ON/OFF ND; DALI2	070: 7 W; 1200 lm	-30 °C + +60 °C
N0; ON/OFF ND; DALI2	100: 10 W; 1800 lm 130: 13 W; 2400 lm	-30 °C + +55 °C
N0; ON/OFF ND; DALI2	160: 16 W; 2900 lm 200: 20 W; 3400 lm	-30 °C + +50 °C
N0; ON/OFF ND; DALI2	230: 23 W; 4000 lm	-30 °C + +45 °C
EN; Emergency unit 3H + ON/OFF driver EA; Emergency unit 3H Autotest + ON/OFF driver ED; Emergency unit 3H DALI + DALI2 driver	070: 7 W; 1200 lm 100: 10 W; 1800 lm 130: 13 W; 2400 lm	0 °C + +40 °C
EN; Emergency unit 3H + ON/OFF driver EA; Emergency unit 3H Autotest + ON/OFF driver ED; Emergency unit 3H DALI + DALI2 driver	160: 16 W; 2900 lm 200: 20 W; 3400lm 230: 23 W; 4000 lm	0 °C + +30 °C
E0; Emergency unit 3H	025: 2,5 W; 400 lm	0 °C + +45 °C
A0; Emergency unit 3H Autotest	025: 2,5 W; 400 lm	0 °C + +45 °C
D0; Emergency unit 3H DALI	025: 2,5 W; 400 lm	0 °C + +45 °C

